

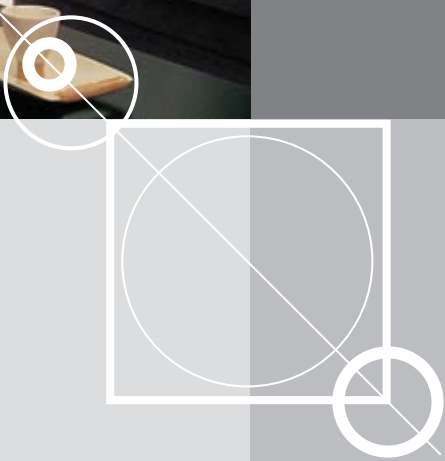



Roman Blinds



Product Overview

Roman Blinds



Roman Blinds bring casual styling to any window. The choice of fabrics is extensive, ranging from blockouts to the latest developments in light-controlling Sunscreens. A range of decorator options gives the Interior Designer artistic freedom to create a space that reflects their individuality.

Colour Range

There are 7 ranges of fabric in the Roman Blinds collection.

- Landscape
- Extraview Plus
- Extraflocke
- Seascape
- Allure
- Mist
- Urban Shade



Transparent Sunscreen



Semi-transparent Mist



Dim-out Seascape



Blockout Extraflocke

Applications

Internal installations where heat, light and/or privacy control are required, e.g. offices, board rooms and common areas.

Installations where a casual styling or home-like feel is sought.

Fabric Specification Overview

All Roman Blade fabrics are 100% polyester or polymer coated fibreglass. Many are treated with TEFLON® Fabric Protector and SANITIZED® Antimicrobial Protection.

Hardware Specification Overview

Roman Blinds

Cordlock and pulley system mounted on lacquered headrail. 'No-Sew' aluminium battens with self-aligning cords.

Durability

The colour fastness of the fabric is 6-7 Blue Scale (where maximum score is 7) (AS 2001.4.21)

The aluminium battens are unaffected by moisture and corrosion resistant.

The operating hardware has been cycle tested to ensure long term performance.

Energy Benefits

Window treatments that are tight fitting to the window and made from closely woven fabrics, provide one of the most effective ways to prevent heat transmittance through windows.

Roman Blinds can be fitted in the window reveal and have no gaps between panels that would otherwise allow warm air to escape. Select a blackout or room darkening fabric, with a white or light colour facing the window for optimum energy performance. Extraflocke fabrics come in a range of colours, some specifically selected for the Commercial environment and have a neutral flocked backing for superior heat rejection.

Environmental and Employee Benefits

Fabrics can be selected to give building occupants the optimum combination of light and heat control, privacy and view to the outside. The ease of operation of Roman Blinds puts all users in complete control of their environment.

New Zealand Window Shades, operates under an Environmental Management System that actively works towards waste and emission reduction and maximising the use of recycling.

Hunter Douglas Limited polyester fabrics do not emit VOCs.

Fire Retardant

Several fabrics are suitable for use in Class 2-9 buildings except in Fire Isolated Exits, in accordance with the Building Code of Australia. Please ask about the fire properties of the fabric of your choice.

Quality

Hunter Douglas, the supplier of Roman Blind fabrics and components to NZWS, is a quality endorsed company, certified as complying with the requirements of AS/NZS ISO 9001:2000.

Commercial Warranty

All Roman Blinds are covered by a 1 year Commercial Warranty. Conditions apply.



Features

'No-sew' Design


The method of manufacture ensures that panels are always parallel and there are no pin holes of light visible in blackout fabrics. Aluminium battens are colour co-ordinated with the rear face of the fabric.



Fade-protected Design

The folding panel arrangement of Roman Blinds ensures that the front face of the fabric is protected from harmful UV rays, even when the blind is raised.

Each extrusion hangs slightly lower than the previous one to minimise the stack depth when the shade is raised. Stack depth is 280mm.

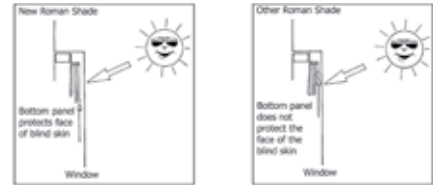

Lacquered Headrail

The operating mechanism of Roman Blinds is attached to a lacquered timber headrail. The colour is co-ordinated with the fabric, for a less obtrusive appearance and the lacquer coating protects the timber from the ingress of moisture.

Cord Location

Roman Blinds are manually operated using cords located at the front of the blinds. Unlike Roman Blinds with rear located operating cords, this ensures that the user does not have to reach around the back of the blind to open it (which usually causes damage to the fabric over time). Additionally, the cords are not inclined to rub against the edge of the fabric during raising and lowering, which can cause the fabric to fray.

Cords are finished with colour co-ordinated tassels.

The blind is held in the raised position with a positive action cordlock.



Valance or Pelmet

Roman Blinds are finished with an integrated valance. This serves the function of covering the operating hardware and provides a neat finish to the blind. The hardware is therefore hidden from both the interior and exterior view, unlike some other roman shade designs.

Optional 70mm Cedar pelmet is available with a further option of mitred returns.



Valance Front View



Cedar Pelmet

Motorisation

Roman Blinds can also be motorised. They can be controlled by switch, remote control or operation by C-Bus or building management systems. Blinds can be operated individually or via group controls.

Trim Options



Cedar Bottom rail (optional)



Aluminium Bottom Rail is standard.



Aluminium Battens (front view)

Specifications & Size Limitations

Size Limitations

	Extraflocke Fabric	Allure Fabric	Seascape Fabric	Sunscreen Fabrics	Motorised
Minimum Width (mm)	300	240	300	300	580
Maximum Width (mm)	2450	2400	2400	2500	Same per fabric as manual blinds
Minimum Drop (mm)	600	600	600	600	600
Maximum Drop (mm)	2500	2500	2500	2500	2500
Maximum Area (sqm)	6.0	6.0	5.8	6.1	6.0

Stack space is 280mm

Panel Sizes


The top panel is always 280mm and the other panel sizes will vary depending on the drop of the blind.

Drop (mm)	No. of Panels
under 700	3
701-1149	5
1150-1549	7
1550-1949	9
1950-2349	11
over 2350	13

Note: this chart is an indication only.

Installation

Reveal Fit

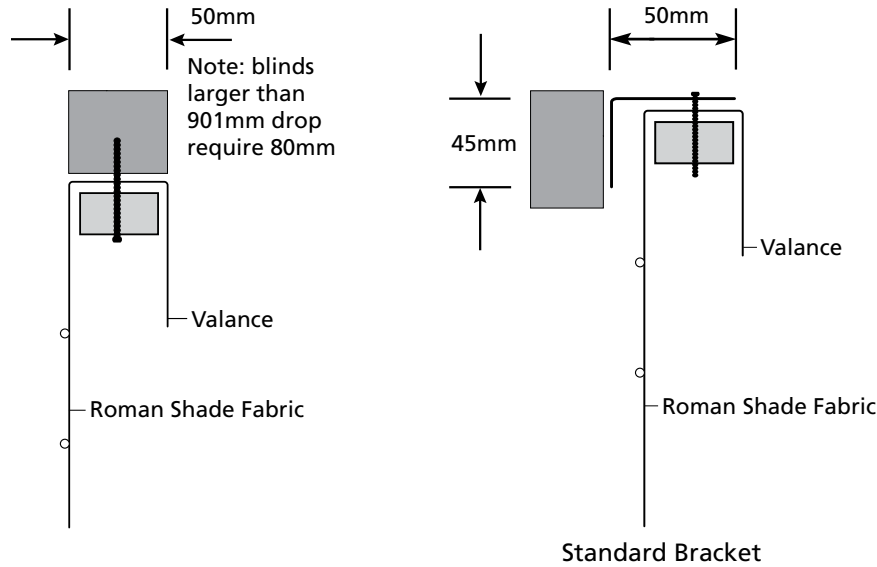

Specification Template

Product Name	Roman Blinds
Material	Fabric shall be Hunter Douglas fabric which is manufactured from Woven Polyester/Polymer Coated Fibreglass.
Colour	The colour shall be
Fabric Treatment	(If applicable – check fabric specification for details and strike out treatments that are not applicable.) Fabric shall be treated with TEFLON® Fabric Protector and SANITIZED® Antimicrobial Protection.
Operation	The blind shall be operated using a cord lock and pulley system with 'no sew' aluminium extrusions with self-aligning cords/timber battens.
Headrail	The headrail shall be manufactured from lacquered timber, 40mm x 19mm in dimension.
Pelmet	The Roman Blind shall incorporate a fabric pelmet to conceal the operating hardware.
Panel Configuration	The Roman Blind shall fold in such a manner that the front face of the fabric is never exposed to the sun.